LUXOR

Metallic Feel

Gold, Argent and Cooper

Colours for creating character



Argent

Gold

Cooper

TAU A CLASSY APPROACH TO PROGRESS

DECORATIVE ACCENTS

A NEW DIMENSION


The beauty of detail transforms spaces. Our new collection of metallic mosaics is designed for those who wish to go beyond the conventional and bring touches of character, light, and design into their interiors.

Each piece has been crafted to integrate naturally with ceramic surfaces, adding decorative accents that elevate the aesthetic and enhance the personality of the environment. The texture of metal, its unique vibration, and its subtle yet striking presence turn every wall into a visual experience.


We present three designs —Flowers, Triangle, and Square— conceived to inspire a variety of styles and sensibilities. From geometric compositions to organic patterns, each mosaic finds its place in spaces that celebrate contemporary sophistication.

Available in three finishes —Gold, Silver, and Copper— these mosaics allow for combinations that play with brightness, reflection, and depth. An invitation to explore new ways of illuminating spaces, giving them rhythm, dimension, and modernity.

Metallic mosaics don't just decorate: they transform.

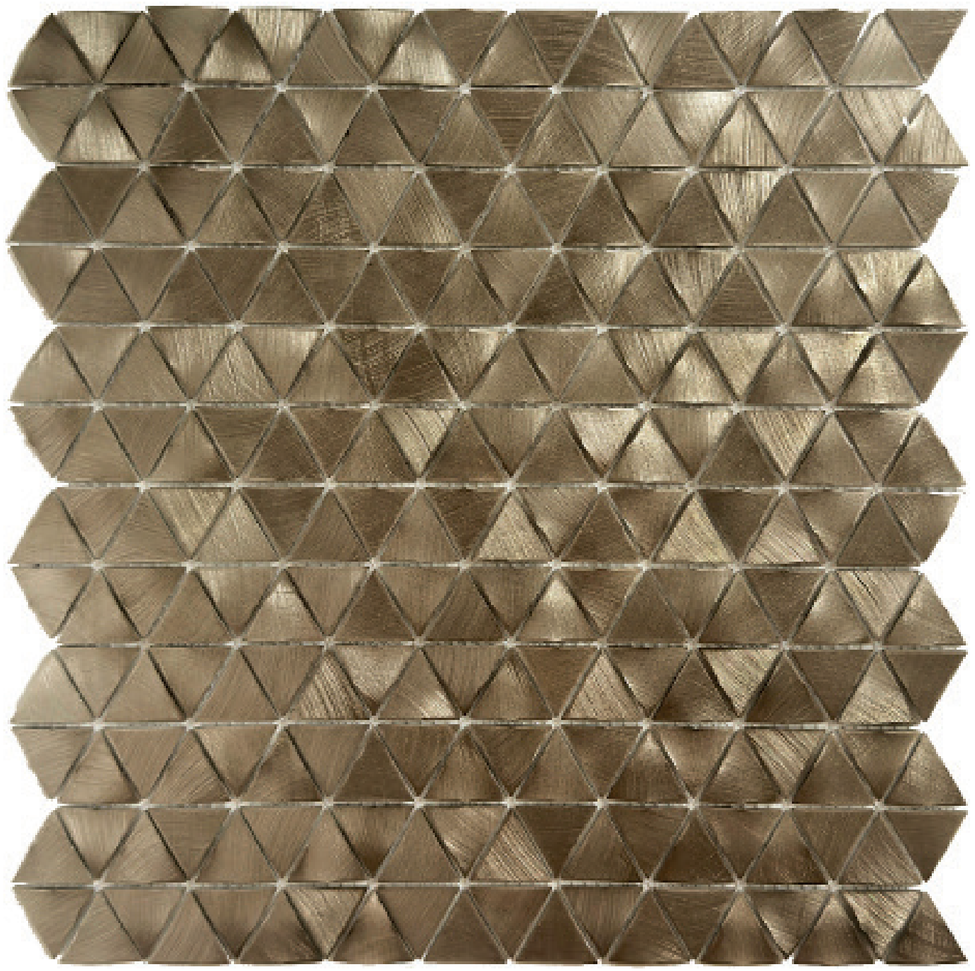

Mosaico Metal Triangle Gold 30,2x30,4



Argent




Gold




Cooper


Mosaico Metal Triangle Gold 30,2x30,4.

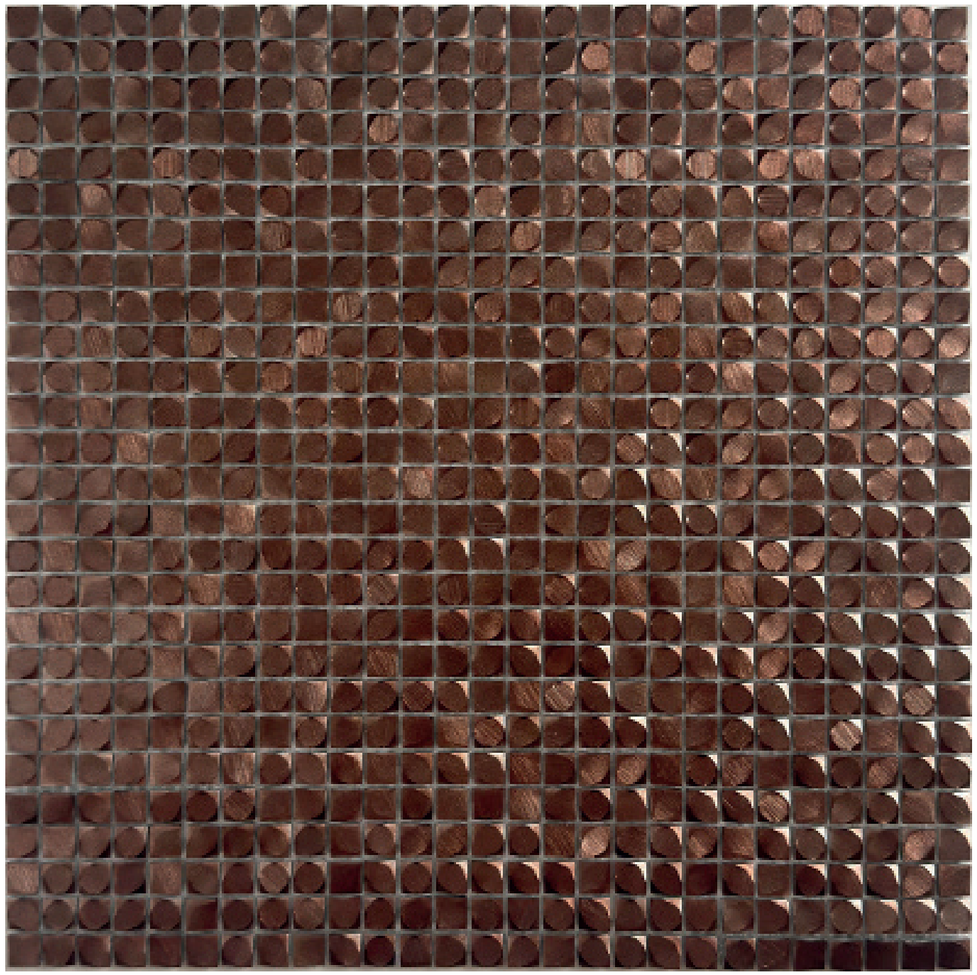


Mosaico Metal Square Cooper 30,5x30,5.



Argent




Gold



Cooper



Mosaico Metal Square Cooper 30,5x30,5.

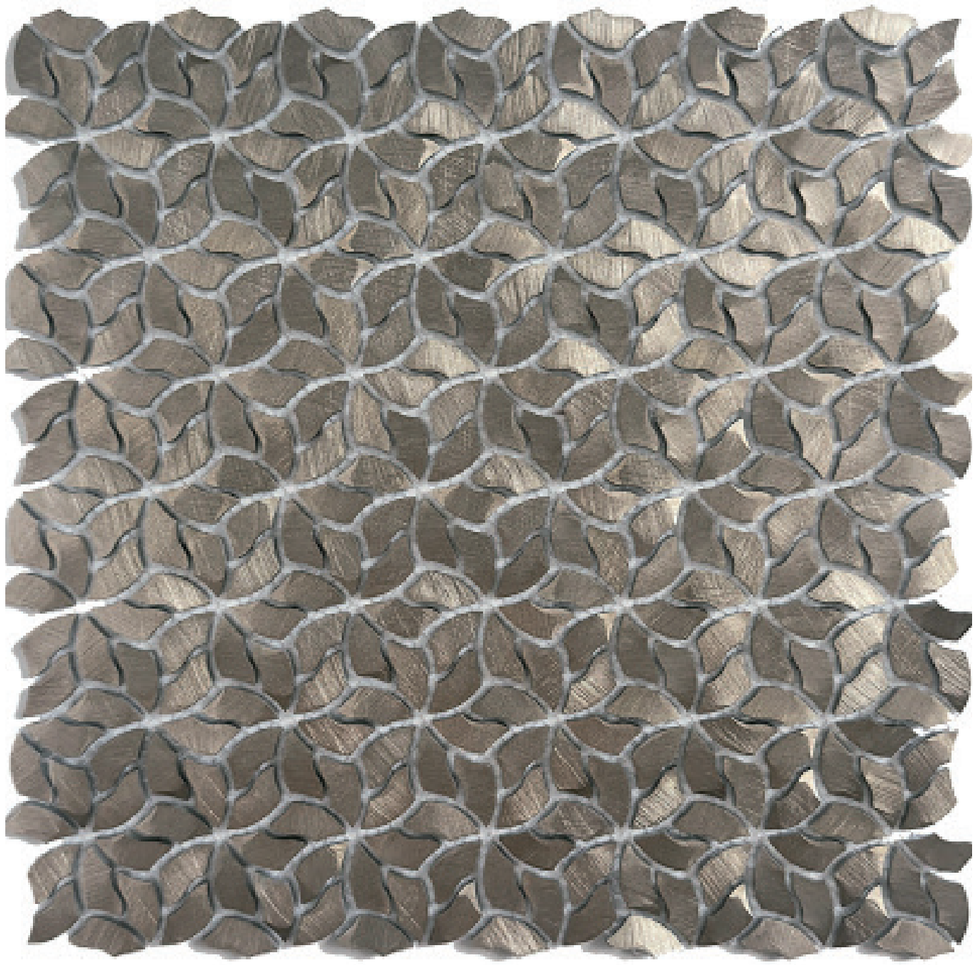

Mosaico Metal Flowe Silver 29,5x28,4



Argent



Gold



Cooper





Mosaico Metal Flower Silver 29,5x28,4.

PACKING:

Descripción	UM Caja	PZ Caja	PZ Pallet	M2 Caja	M2 Pallet	CJ Pallet	KG Caja	KG Total
29,5×28,4 Malla	11	11	1980	0.92	165.60	180	5.30	974.00
30,2x30,4 Malla	11	11	1980	1.00	180.00	180	4.10	758.00
30,5x30,5 Malla	11	11	1980	1.02	183.60	180	7.20	1,316.00

ATTENTION:

Due to its artisanal manufacture and the special materials it is made with aluminum, this product may present variations in caliber, texture, design and shade.
These variations give the product a personality all of its own and unique characteristics. Therefore, no claims will be accepted in this connection.

INSTALLATION:
1. PREPARING THE SUBSTRATE
The substrate on which the Mosaic tiles are to be laid should be smooth and consistent. Make sure that it is clean and dry. We recommend you to level the surface to create a white background. When there are deviations in flatness, use special leveling products to correct.

2. LAYING MOSAIC TILES
For the correct installation of Aluminum Mosaic tiles, we recommend the use of white one-Flex, high-performance cement-based adhesive especially suitable for the installation of Porcelain Tile or we recommend the use of an R2 T type technological bi-component polyurethane based adhesive in general..
Using an 8mm maximum size notched trowel, use its smooth side to spread the adhesive evenly on the wall, shall always be thin layer, and then we will "comb" the adhesive with the notched side (3 mm min. grooves). Do not spread the adhesive over large areas to prevent it from drying before placing the material. Making sure that the adhesive has formed a surface film (within its open time) before laying the mosaic tile. After installing the mosaic tile, we shall press with a rubber trowel and make sure that the distance between tile is equal to the distance between each piece, so that the installation is uniform all joints have the same spacing. Before grouting, we shall let the adhesive dry for hours. But must follow the terms of open times, reaction time, transit time, durability, dosage, application, products, formats, etc. that adhesive manufacturer made.

3. GROUTING THE JOINTS
Before the mosaic tiles are grouted, they should all be absolutely clean, with no dust remains. Any surplus adhesive from the tile-laying process should be removed while it is still wet, and the rest of the adhesive should be left to dry before starting to grout the mosaic. We recommend you to use un-sanded grouting (neutral ph) with an excellent mechanical resistance, low water absorption rate, and resistance to mould.
Instructions: Spread the grouting material over the mosaic tiles with a rubber trowel and fill the joints well, right down to the bottom. Use the same trowel to remove any surplus material. Cleaning up: Before the grouting mortar sets, any surplus material must be removed with a sponge or cloth. Repeat the cleaning procedure at least twice, rinsing the sponge or cloth well.

CUTTING:
We recommend that aluminum pieces be cut using a water-jet machine or use a radial tile saw with a steel cutting blade to cut the mesh-mounted tiles. . Cut from back mesh side, and lay the cut part so that it is concealed. To perforate mosaic tile in order to hang mirrors, counter tops, wall lights etc., we recommend you to use special drill bits for perforating aluminum.

CLEANING AND MAINTENANCE:
For everyday cleanings, we recommend the use of a soft dampened cloth to clean, add neutral soap if too dirty, and then dry the surface with a soft clean cloth to avoid scratches. Never use energetic detergents or abrasive cleaning products or elements that could cause irreversible damage to pieces. No Bleach, No Salfuman (HCl).

NO CLAIMS WILL BE ACCEPTED ON PIECES IN THE EVENT THAT THESE GUIDELINES HAVE NOT BEEN ADHERED TO

TAU A CLASSY APPROACH TO PROGRESS